

FALD008

START HERE! READ ME FIRST

Don't be a hero and muscle through this installation without reading these fitting instructions first! Improper installation of this gear may void certain aspects of your warranty.


Before you begin, take a moment and open all your Front Runner rack kit boxes and gather the assembly instructions for the various components.

A complete kit will contain:

- 1. A Front Runner Mounting System specific to your vehicle
- 2. A Front Runner Rack Tray or Load Bar Slats

This document will guide you through the assembly of the mounting system and assist you in fitting the roof rack tray or load bars to your specific vehicle.

Please refer to the next page for a list of all the components, quantities and tools required.

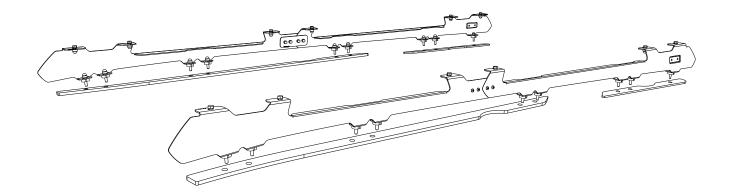

IMPORTANT WARNING! /

IT IS CRITICAL THAT ALL FRONT RUNNER PRODUCTS BE PROPERLY AND SECURELY ASSEMBLED AND ATTACHED TO YOUR VEHICLE. IMPROPER ATTACHMENT COULD RESULT IN AN AUTOMOBILE ACCIDENT, AND COULD CAUSE SERIOUS BODILY INJURY OR DEATH. YOU ARE RESPONSIBLE FOR ASSEMBLING AND SECURING ALL FRONT RUNNER PRODUCTS TO YOUR VEHICLE, CHECKING THE ATTACHMENTS PRIOR TO USE, AND PERIODICALLY INSPECTING THE PRODUCTS FOR ADJUSTMENT, WEAR AND DAMAGE. THEREFORE, YOU MUST READ AND UNDERSTAND ALL OF THE INSTRUCTIONS AND PRECAUTIONS SUPPLIED WITH YOUR FRONT RUNNER PRODUCT PRIOR TO INSTALLATION OR USE. IF YOU DO NOT UNDERSTAND ALL OF THE INSTRUCTIONS AND CAUTIONS, OR IF YOU HAVE NO MECHANICAL EXPERIENCE AND ARE NOT THOROUGHLY FAMILIAR WITH THE INSTALLATION PROCEDURES, YOU SHOULD HAVE THE PRODUCT INSTALLED BY A PROFESSIONAL INSTALLER OR OTHER QUALIFIED PERSONNEL.


NOTE: Front Runner will not be responsible for any damage caused by the failure to install the product according to these instructions.


Please call us if you have any questions about the installation of this product.

1 GET ORGANIZED

IN THE BOX				
1	2 X	Foot Rail Front - 1LH + 1RH		
2	2 X	Foot Rail Rear - 1LH + 1RH		
3	2 X	Spacer Front		
4	2 X	Spacer Rear		
5	18 X	Spacer		
6	10 X	M6 Nut Cap		
7	8 X	M6 Nyloc Nut		
8	10 X	M6 x 12 x 1SS Flat Washer		
9	2 X	Joiner Plate		
10	8 X	M6 x 12 Button Head Bolt		
11	28 X	M8 x 16 x 1.6SS Please Washer		
12	16 X	M8 SS Spring Washer		
13	16 X	M8 x 35 Hex Bolt		
14	28 X	M8 Nut Cap		

IN THE BOX				
15	12 X	M8 x 20 Hex Bolt		
16	12 X	M8 Nyloc Nut		
17	2 X	M6 x 35 hex Bolt		
18	2 X	M6 SS Spring Washer		
19	2 X	M6 x 19 x 1SS Flat Washer		




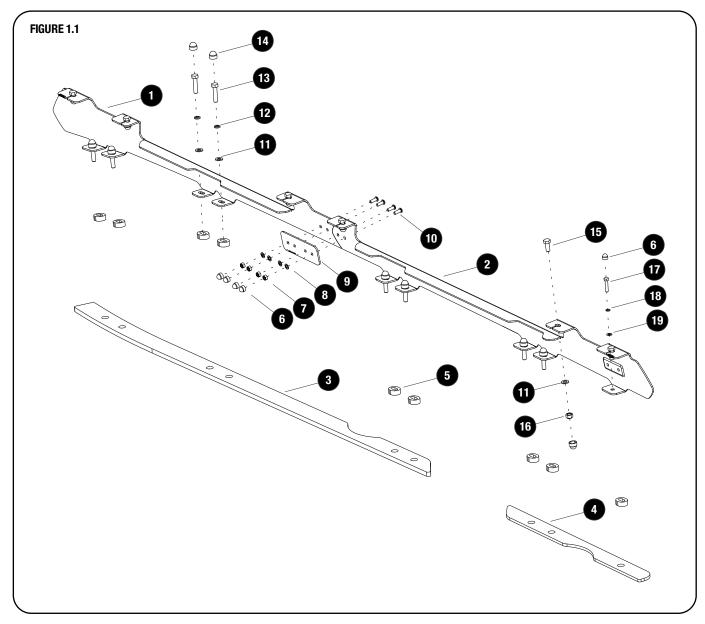



RACK FITMENT ON VEHICLE WITH OEM RAILS


2.1

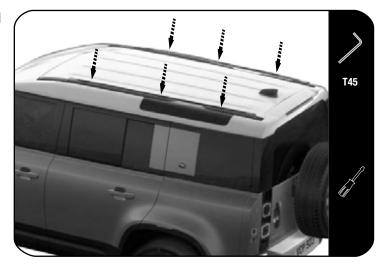

Remove the OEM rails from left and right side of the vehicle.

Remove the front saddle bracket under both


2.2

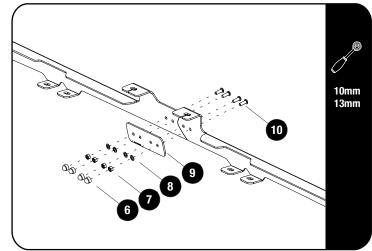

Assemble the Front and Rear Foot Rails (Items 1 & 2) using the Joiner Plate (Item 9) and M6 x 12 Button Head Bots, M6 x 12 x 1SS Flat Washers and M6 Nyloc Nuts (Items 7, 8 & 10) as shown.

Finish of by placing M6 Nut Caps (Item 6) on the Nyloc Nuts.

2.3

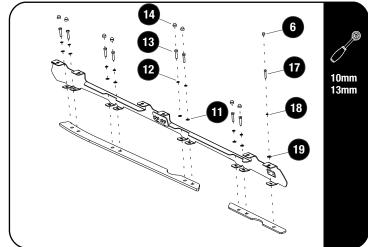

Remove tape covering rear hole.

Place the Front and Rear Spacers as shown into the ditch where you removed the OEM

Align the holes in the spacers with the factory holes in the vehicles ditch.

Secure the Foot Rails to the vehicle using M8 x 35 Hex Bolts, M8 SS Spring Washers and M8 x 16 x 1.6SS Flat Washers (Items 11, 12 & 13) in all holes exept the one at the




Use an M6 x 35 Hex Bolts, M6 SS Spring Washers and M6 x 19 x 1SS Flat Washers (Items 17, 18 & 19) on the two rear holes in the Foot Rail.

Fully tighten all bolts.

Finish of by placing M8 Nut Caps (Item 14) on the M8 Bolt Heads and M6 Nut Caps (Item 6) on the M6 Bolt Heads

RACK FITMENT ON VEHICLE WITH OEM RAILS

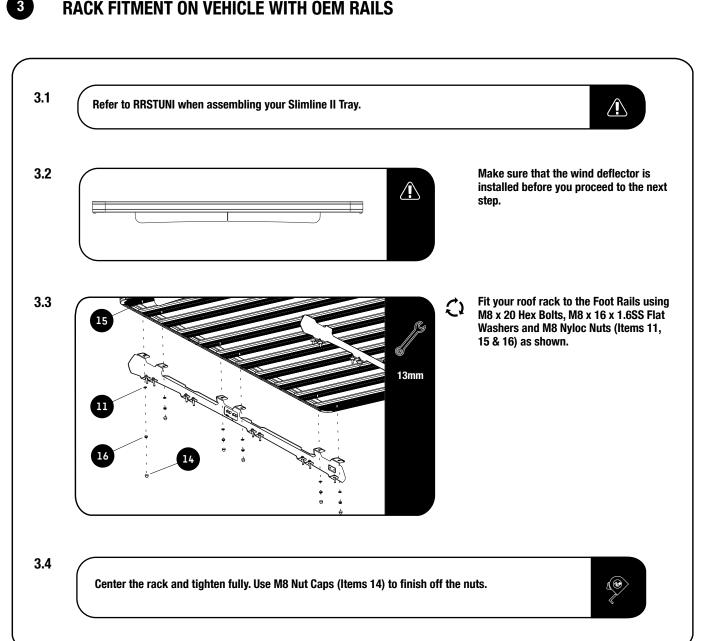


RACK FITMENT ON VEHICLE WITHOUT OEM RAILS




Remove the plugs on the ditch cover.

Remove the screws under the plugs.

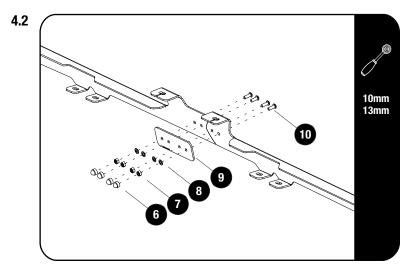

Assemble the Front and Rear Foot Rails (Items 1 & 2) using the Joiner Plate (Item 9) and M6 x 12 Button Head Bots, M6 x 12 x 1SS Flat Washers and M6 Nyloc Nuts (Items 7, 8 & 10) as shown.

Finish of by placing M6 Nut Caps (Item 6) on the Nyloc Nuts.

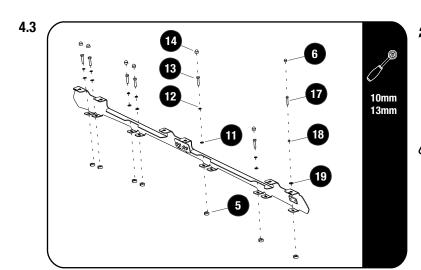

Place one Spacer (Item 5) into each of the openings where the rail plugs was removed in 2.1


Secure the Foot Rails to the vehicle using M8 x 35 Hex Bolts, M8 SS Spring Washers and M8 x 16 x 1.6SS Flat Washers (Items 11, 12 & 13) in all holes exept the one at the rear.


Use an M6 x 35 Hex Bolts, M6 SS Spring Washers and M6 x 19 x 1SS Flat Washers (Items 17, 18 & 19) on the two rear holes in the Foot Rail.

Fully tighten all bolts.

Finish of by placing M8 Nut Caps (Item 14) on the M8 Bolt Heads and M6 Nut Caps (Item 6) on the M6 Bolt Heads

5 RACK FITMENT ON VEHICLE WITHOUT OEM RAILS

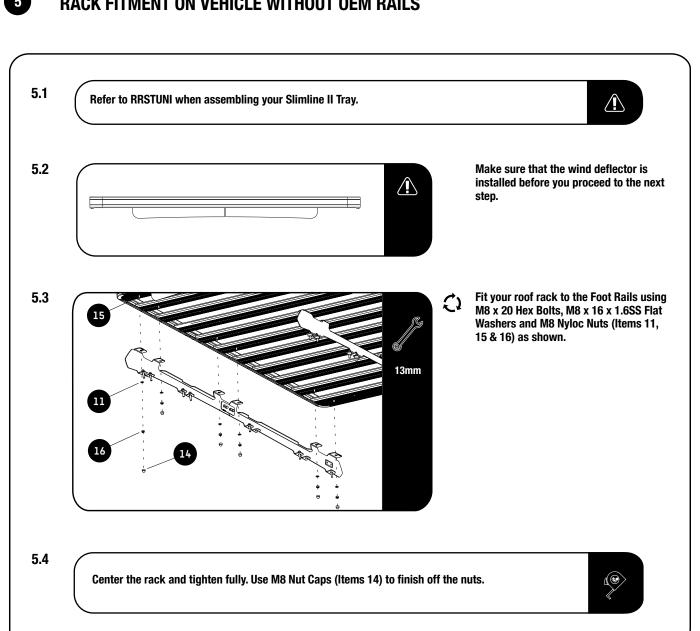





INSTALL OTHER VEHICLE AND RACK ACCESSORIES

Now's the time to visit your favorite Front Runner Dealer in person or online.

IMPORTANT! /

FRONT RUNNER RACK KITS OFTEN HAVE A HIGHER LOAD RATING THAN THE VEHICLES THEY ARE MOUNTED TO. PLEASE REFER TO YOUR SPECIFIC VEHICLE MANUFACTURER FOR A RECOMMENDED ROOF RATING. FRONT RUNNER CANNOT BE RESPONSIBLE FOR IMPROPER LOADING BEYOND THE VEHICLE MANUFACTURER'S STATED LOAD CAPACITY.

Be sure to tag us. We love to see our gear in action! #FrontRunnerOutfitters #BornToRoam





